

Galiza Graphite Classic Range

Galiza Graphite is a very smooth slate, sourced from Brazil.

Used mainly in the South due to its colour and very smooth texture, it is suitable for new build, conversion or refurbishment projects.

SIGA Classic Range of natural roofing slates are available in a variety of sizes, colours and textures. Due to the slate selection process, the varied selection of the Classic range will require careful sorting and grading in order to show the rustic nature of the slate. All SIGA Classic slates offer a 30 Year Warranty (T&C's Apply)

Region Used: East Anglia, London, South Coast, South West

Product Application: Conversion/Refurbishment, Housing Developments, Self Build

Source: Minas Gerais area of Brazil

Colour: Graphite (Dark Grey)


Texture: Very Smooth

Product Standard: BS EN 12326-1:2014

Thermal Cycling: T1

Exposure S02: S1

Water Absorption: W1

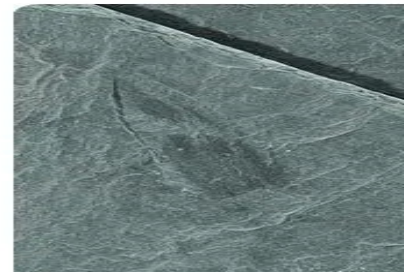

30 Year Warranty, T&C's apply. Must be registered for within 4 weeks of installation

- Fix in accordance with BS 5534
- Full technical support and guidance is available
- Meets the requirements of NHBC
- CCPI Assessed 007600114/1126

Product Code	Thickness	Width	Length	Type	Coverage (Slates/m ²)
I0532849	6mm	200mm	400mm	Slate Holed 100mm	33.3
I0727489	6mm	250mm	400mm	Slate Holed 100mm	33.3
I0532850	6mm	300mm	400mm	Slate & Half Blank	N/A
I0727490	6mm	375mm	400mm	Slate & Half Blank	N/A
I0530358	6mm	250mm	500mm	Slate Holed 100mm	20
I0570537	6mm	300mm	500mm	Slate Holed 130mm	18
I0519010	6mm	375mm	500mm	Slate & Half Blank	N/A
I0570539	6mm	450mm	500mm	Slate & Half Blank	N/A
I0576838	6mm	300mm	600mm	Slate Holed 100mm	13.1
I0576839	6mm	450mm	600mm	Slate & Half Blank	N/A

Slates are a natural product whose thickness/width/length can vary within supply standard tolerances. This variation impacts the quantity of slates that fit our non-returnable wooden packaging. Actual pallet weight and item count are included on the individual label for each pack.

Sorting & Handling

Natural slate should be handled with care. Before the slates are fitted they should be sorted and graded (and holed if necessary) as per BS 5534 and BS 8000. The factory selection of the slate used will have an impact on the amount of grading required.

The following processes should be followed to ensure best practice:

Sort slates into different thicknesses (thick, medium and thin). Thicker slates should be laid at the eaves, thinner slates at the ridge.

Any slate found to be twisted, bowed etc. should be set to one side and used for eave or top slates, or cut for half slates, valleys or chimneys.

Roofing slate is always holed from the back, creating a countersunk area on the front, so that any water present near the hole does not have a direct route to the underside of the slate. It also provides a neat spalled area for the nail head to sit in.

Pre-holed are supplied as standard in the UK. Unholed (blank) slates are also available to special order, and can give peace of mind on very low pitches when used with slate hooks.

Load out the slates on the roof with the thickest slates in the lowest courses.

Fixing

Fixing SIGA slate is straightforward for an experienced slater. Galiza Slates can only be fixed by the modern hook system. Further fixing information is provided below - for a comprehensive guide, please refer to BS 5534. Most SIGA slates come preholed at a nominal 90mm headlap. By simply moving the location of the slate on a standard 50x25mm batten, these can be fixed to obtain headlaps between 72 and 116mm, allowing them to be used on a variety of pitches.

Hook fixing

All natural slates can be hook fixed with "spike-end" nail-in hooks. Only this type of hook is permissible under BS 5534. Crimped spike-end hooks must be used at pitches of 30° or less. Hook fixings should not be used at pitches less than 25°. The hook method offers freedom in design and can reduce labour costs and eliminate breakages.

With hook fixings, the slate is held by the hook and 4 hooks are in contact with each slate, rather than just 2 nails with traditional fixing. This provides increased resistance to wind uplift. To comply with BS 5534, hook should be stainless steel 316 (marine) grade, 2.7mm gauge and at least 5mm longer than the minimum lap required.

Please refer to the SIGA brochure for more details regarding fixing, coverage, batten and holing gauges, headlaps and exposure.

British Standard

BS EN 12326-1:2014

On 31st January 2020 the United Kingdom officially left the European Union.

Prior to this Construction Products had been regulated under EU 305/2011 and its associated Harmonised European Standards.

The UK retained a form of Construction Products Regulation and in doing so assigned Designated Standards in support.

BS EN 12326-1:2014 covers Slate and stone for discontinuous roofing and external cladding - Part 1 Specification for slate and carbonate slate.

The conformity of a slate to the requirements of the Designated standard is stated in the associated Declaration of Performance (DoP).

The DoP lists the values from testing which the supplier declares in support of the products use and performance for a given application.

Actual test methods such as Thermal Cycling (Freeze/Thaw), Water Absorption etc. are described in BS EN 12326-2.